




TEK20XM/TEK20XMP

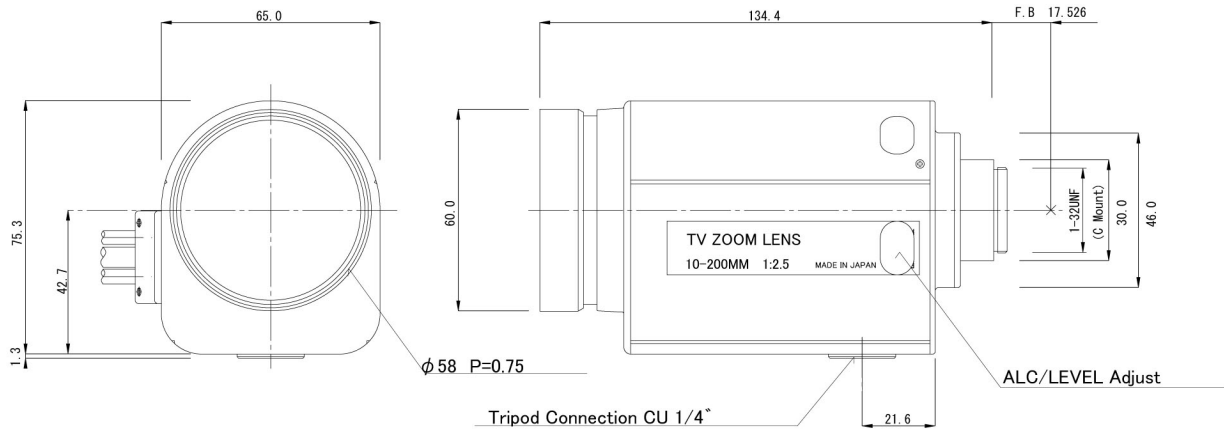

Unit:mm

SPECIFICATION					
FORMAT		1/2"			
MOUNT		C MOUNT			
FOCAL LENGTH		10 - 200 mm			
IRIS RANGE		F2.5 - CLOSE			
ANGLE OF VIEW		(1/2")	43.6 (D) x 35.5 (H) x 27.0 (V)° (WIDE)		
			2.3 (D) x 1.8 (H) x 1.4 (V)° (TELE)		
		(1/3")	33.6 (D) x 27.0 (H) x 20.7 (V)° (WIDE)		
			1.7 (D) x 1.4 (H) x 1.0 (V)° (TELE)		
M.O.D.		2.5 M			
BACK FOCAL LENGTH		24.44 mm			
FLANGE BACK LENGTH		17.526 mm			
FILTER SCREW SIZE		M58 P = 0.75			
DIMENSIONS		65.0 (W) x 75.3 (H) x 134.9 (L) mm			
WEIGHT		Approx.600 g (M) / 620 g (MP)			
OPERATION		< IRIS >	MOTORIZED	CONTROL VOLTAGE : DC6-12 V, MAX.30mA (6V)	
		<ZOOM>	MOTORIZED	MOTORIZATION SPEED : APPROX. 4.5sec. (6V)	
		<FOCUS>	MOTORIZED	CONTROL VOLTAGE : DC6-12 V, MAX.40mA (6V)	
				MOTORIZATION SPEED : APPROX. 11.0sec. (6V)	
				CONTROL VOLTAGE : DC6-12 V, MAX.40mA (6V)	
				MOTORIZATION SPEED : APPROX. 12.5sec. (6V)	
OPERATING TEMPERATURE		-10 - +50°C			
[CABLE CONNECTION]					
<10 CORE CABLE FOR ZOOM AND FOCUS >			PRESET FOR ZOOM AND FOCUS (MP-TYPE)		
WHITE	IRIS (+)	OPEN	PURPLE	POT SUPPLY	POWER (+)
BROWN	IRIS		GRAY	ZOOM OUT	MAX. at TELE
YELLOW	ZOOM (+)	TELE	BLUE	FOCUS OUT	MAX. at NEAR
RED	ZOOM		ORANGE	POT RETURN	POWER (-)
GREEN	FOCUS (+)	NEAR			
BLACK	FOCUS				

Specifications are subject to change without notice.

TEKSTAR Optical Inc.

270 KOHR RD
 KINGS PARK, NY 11754-1237
Toll Free: 888-LENS-GUY (888-536-7489)
Phone: 631-663-3558
Toll Free Fax: 1-888-CCTVFX1
Fax: 631-269-5368
E-mail: info@tekstaroptical.com
 www.tekstaroptical.com