




## TEK20XV/TEK20XVP

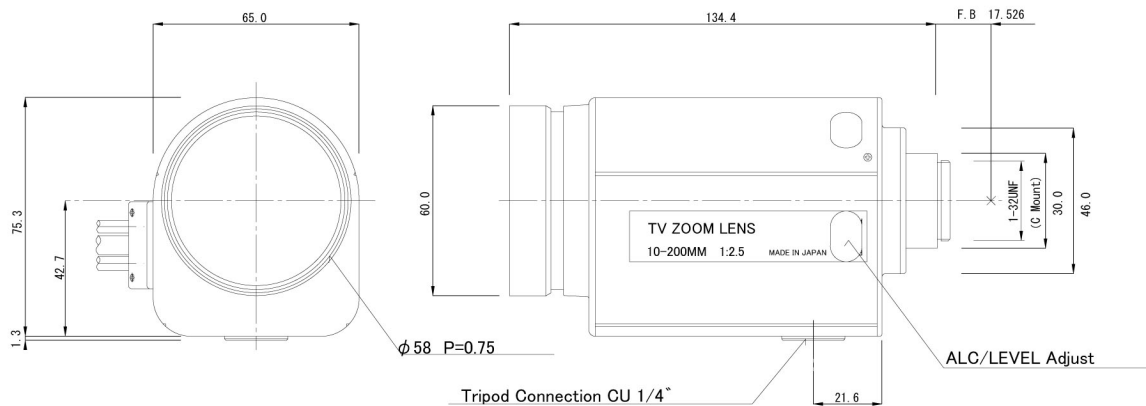

Unit:mm

SPECIFICATION					
FORMAT	1/2"				
MOUNT	C MOUNT				
FOCAL LENGTH	10 - 200 mm				
IRIS RANGE	F2.5 - 360				
ANGLE OF VIEW	(1/2") 43.6 (D) x 35.5 (H) x 27.0 (V) <sup>°</sup> (WIDE) 2.3 (D) x 1.8 (H) x 1.4 (V) <sup>°</sup> (TELE)				
	(1/3") 33.6 (D) x 27.0 (H) x 20.7 (V) <sup>°</sup> (WIDE) 1.7 (D) x 1.4 (H) x 1.0 (V) <sup>°</sup> (TELE)				
M.O.D.	2.5 M				
BACK FOCAL LENGTH	24.44 mm				
FLANGE BACK LENGTH	17.526 mm				
FILTER SCREW SIZE	M58 P = 0.75				
DIMENSIONS	65.0 (W) x 75.3 (H) x 134.9 (L) mm				
WEIGHT	Approx.600 g (GA) / 620 g (GAP)				
OPERATION	< IRIS > AUTO (VIDEO) INPUT VOLTAGE : DC8 - 16V, MAX. 50 mA INPUT SIGNAL : VIDEO SIGNAL ( V or VS ) INPUT IMPEDANCE : HIGH IMPEDANCE SENSITIVITY ADJUSTMENT : 0.5 - 1.0 Vp-p RESPOND SPEED : 3.0sec. or less				
	< ZOOM > MOTORIZED CONTROL VOLTAGE : DC6-12 V, MAX.40mA (6V) MOTORIZATION SPEED : APPROX. 11.0sec. (6V)				
	< FOCUS > MOTORIZED CONTROL VOLTAGE : DC6-12 V, MAX.40mA (6V) MOTORIZATION SPEED : APPROX. 12.5sec. (6V)				
OPERATING TEMPERATURE	-10 - +50°C				
[ CABLE CONNECTION ]					
< 4 CORE CABLE FOR AUTO-IRIS >					
WHITE	VIDEO SIGNAL	0.5 - 1.0Vp-p			
RED	POWER (+)	DC8 - 16V			
BLACK	POWER (-)	GND			
GREEN	NC				
< 8 CORE CABLE FOR ZOOM AND FOCUS >		PRESET FOR ZOOM AND FOCUS (GAP-TYPE)			
YELLOW	ZOOM (+)	TELE	PURPLE	POT SUPPLY	POWER (+)
RED	ZOOM		GRAY	ZOOM OUT	MAX. at TELE
GREEN	FOCUS (+)	NEAR	BLUE	FOCUS OUT	MAX. at NEAR
BLACK	FOCUS		ORANGE	POT RETURN	POWER (-)

Specifications are subject to change without notice.

**TEKSTAR Optical Inc.**

270 KOHR RD  
KINGS PARK, NY 11754-1237  
**Toll Free:** 888-LENS-GUY (888-536-7489)  
**Phone:** 631-663-3558  
**Toll Free Fax:** 1-888-CCTVFX1  
**Fax:** 631-269-5368  
**E-mail:** info@tekstaroptical.com  
www.tekstaroptical.com