




TEKC30XV/TEK30XVP

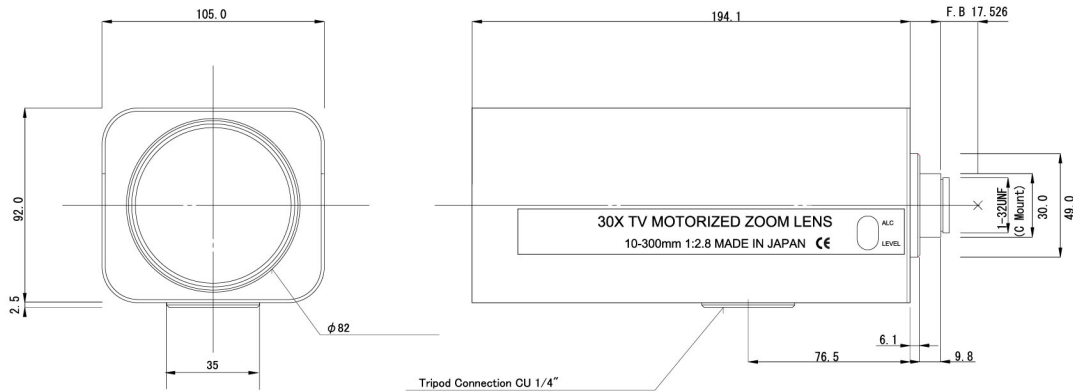

SPECIFICATION				
FORMAT	1/2"			
MOUNT	C MOUNT			
FOCAL LENGTH	10 - 300 mm			
IRIS RANGE	F2.8-360			
ANGLE OF VIEW	(1/2") 43.6 (D) x 35.5 (H) x 27.0 (V) (WIDE) 1.5 (D) x 1.2 (H) x 0.9 (V) (TELE)			
	(1/3") 33.4 (D) x 27.0 (H) x 20.4 (V) (WIDE) 1.1 (D) x 0.9 (H) x 0.7 (V) (TELE)			
M.O.D.	3M			
BACK FOCAL LENGTH	37.87 mm			
FLANGE BACK LENGTH	17.526 mm			
FILTER SCREW SIZE	M82 P = 0.75			
DIMENSIONS	105 (W) x 92.0 (H) x 210.0 (L) mm			
WEIGHT	APPROX 1,850g			
OPERATION	AUTO (VIDEO)			
	INPUT VOLTAGE : DC8-16V, MAX.30mA INPUT SIGNAL : VIDEO SIGNAL (V or VS) INPUT IMPEDANCE : HIGH IMPEDANCE SENSITIVITY ADJUSTMENT : 0.5 - 1.0 Vp-p RESPOND SPEED : 4.0sec. or less.			
<ZOOM>	MOTORIZED			
	CONTROL VOLTAGE : DC6-12V, MAX.50mA (6V) MOTORIZATION SPEED : APPROX. 10.0sec(6V)			
<FOCUS>	MOTORIZED			
	CONTROL VOLTAGE : DC6-12V, MAX.50mA (6V) MOTORIZATION SPEED : APPROX. 12.0sec (6V)			
OPERATING TEMPERATURE	-10 - +50°C			
[CABLE CONNECTION]				
< 4 CORE CABLE FOR AUTO-IRIS >				
WHITE	VIDEO SIGNAL	0.5 - 1.0Vp-p		
RED	POWER (+)	DC8 - 16V		
BLACK	POWER (-)	GND		
GREEN	NC			
<10 CORE CABLE FOR ZOOM AND FOCUS >		PRESET FOR ZOOM AND FOCUS		
WHITE	NC	PURPLE	POT SUPPLY	POWER (+)
BROWN	NC	GRAY	ZOOM OUT	MAX. at TELE
YELLOW	ZOOM (+)	ORANGE	POT RETURN	POWER (-)
RED	ZOOM	BLUE	FOCUS OUT	MAX. at NEAR
GREEN	FOCUS (+)			
BLACK	FOCUS			

Specifications are subject to change without notice.

TEKSTAR Optical Inc.

270 KOHR RD
KINGS PARK, NY 11754-1237
Toll Free: 888-LENS-GUY (888-536-7489)
Phone: 631-663-3558
Toll Free Fax: 1-888-CCTVFX1
Fax: 631-269-5368
E-mail: info@tekstaroptical.com
www.tekstaroptical.com