




## TEK35X SERIES

### SPECIFICATIONS

1 Focal Length	-----	10 - 350mm
2 Relative Aperture	-----	WIDE F1.5 (F1000 ND FILTER) TELE F4.4
3 Image Format	-----	1/2" 6.4 X 4.8
4 Angular field of View	-----	1/2" WIDE 26.7° X 35.3° TELE 0.79° X 1.05° 1/3" WIDE 20.1° X 26.7° TELE 0.59° X 0.79°
5 M.O.D.	-----	2.5m
6 Object area at M.O.D.	-----	1/2" WIDE 1121 X 1496 mm TELE 32.6 X 43.4 mm 1/3" WIDE 841 X 1121 mm TELE 24.5 X 32.6 mm
7 Back Focal Length	-----	14.48mm
8 Exit Pupil	-----	98.64mm
9 Mount Type	-----	"C" SLIP MOUNT
10 Iris System	-----	DC MOTOR TYPE
11 Sensitivity Adjustment	-----	0.4 - 1.0V <sub>P-P</sub>
12 Iris Power Supply	-----	DC6 - 12V AUTO IRIS W/AMP
13 Focus & Zoom Voltage	-----	DC6 - 12V DRIVEN BY MOTOR
14 F & Z Current	-----	Maximum 60 mA
15 Weight	-----	2000 g

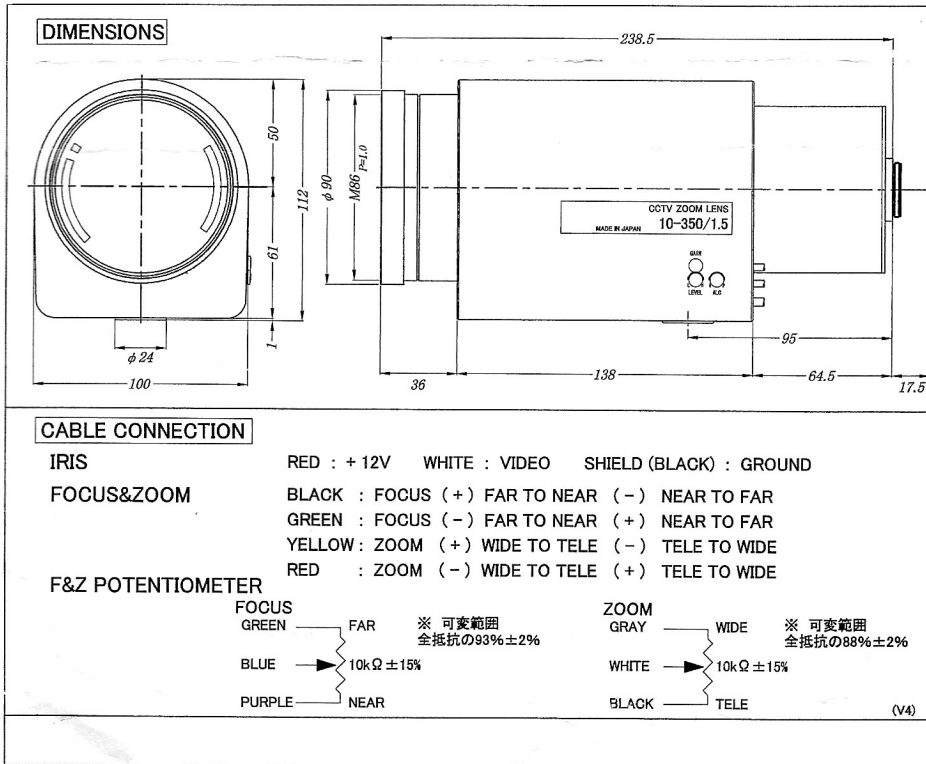

**TEKSTAR Optical Inc.**

54 Bushwick Street  
Melville, NY 11747  
**Toll-free:** 888-LENS-GUY (536-7489)  
**Phone:** 631-421-4818  
**Fax:** 631-423-0128  
**E-mail:** info@tekstaroptical.com