




# TEK50XCNTRL

## Lens Controller

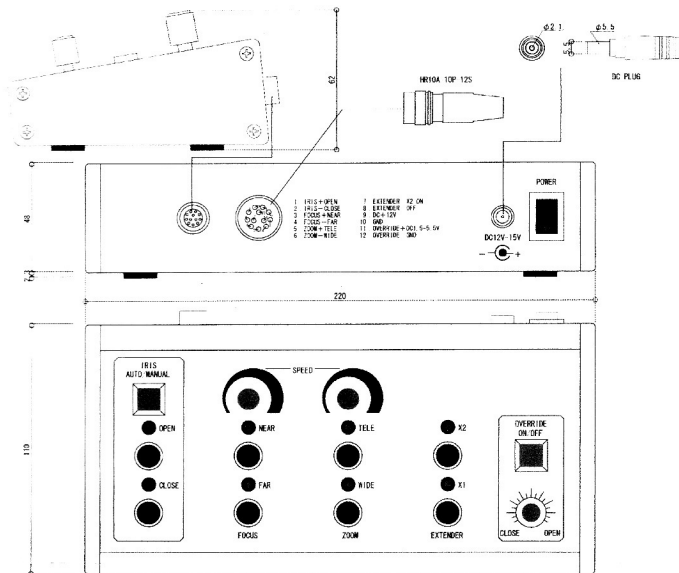

[ SPECIFICATION ]							
INPUT VOLTAGE	DC 12V-15V						
OUTPUT CURRENT	1A						
DIMENSIONS	220 (W) x 48 (H) x 110(L) mm						
WEIGHT	APPROX 450 g						
CONTROL METHOD	<POWER> SWITCH x 1 (ON/OFF) <FOCUS> MOMENTARY SWITCH x 2 (NEAR and FAR) VOLUME x 1(SPEED) <ZOOM> MOMENTARY SWITCH x 2 (TELE and WIDE) VOLUME x 1(SPEED) <EXTENDER> MOMENTARY SWITCH x 2 (2x and 1x) (*2) <IRIS OVERRIDE> PUSH to LOCK SWITCH x 1 VOLUME x 1 (OPEN and CLOSE) (*1) <IRIS> MOMENTARY SWITCH x 2 (OPEN and CLOSE) (*1) <IRIS CHANGE> PUSH to LOCK SWITCH x 1 (AUTO/MANUAL)						
OUTPUT VOLTAGE	<ZOOM / FOCUS> DC 6-12V/MAX. 200mA (SPEED ADJUSTABLE) <ZOOM / EXTENDER> DC 6-12V/MAX. 200mA (SPEED ADJUSTABLE) <IRIS OVERRIDE> DC 1.5-5.5V/MAX. 20mA (*1) <IRIS CHANGE> DC 12V/MAX. 100mA (AUTO/MANUAL)						
OPERATING TEMPERATURE	-10 - +50°C						
[ CABLE CONNECTION ]							
<HR10A-10P-12S PIN>							
(*1) 1	GRAY	MANUAL IRIS	OPEN(+)	7	PINK	EXTENDER (+)	2X
(*1) 2	BLUE	MANUAL IRIS		8	SKY BLUE	EXTENDER	1X
3	GREEN	FOCUS (+)	NEAR	(*1) 9	ORANGE	IRIS CHANGE	MANUAL
4	BLACK	FOCUS (+)	FAR	(*1) 10	PURPLE	IRIS CHANGE	
5	YELLOW	ZOOM (+)	TELE	(*2) 11	WHITE	OVERRIDE IRIS	OPEN(+)
6	RED	ZOOM	WIDE	(*2) 12	BROWN	OVERRIDE IRIS	

TEKSTAR Optical Inc.

270 KOHR RD  
 KINGS PARK, NY 11754-1237  
**Toll Free:** 888-LENS-GUY (888-536-7489)  
**Phone:** 631-663-3558  
**Toll Free Fax:** 1-888-CCTVFX1  
**Fax:** 631-269-5368  
**E-mail:** info@tekstaroptical.com  
 www.tekstaroptical.com